KAMA Consulting - Innovation - Production C 0 116 ((0 0 9 65 (F) (F) 16 0 990 0













PlastoFused is designed for a proper repair in the automotive sector. The functionality of this system is based on heating plastic parts by an perfect ratio of constant temperatur control and air flow intensity.

Operating voltage:	230 V / ~ 50 Hz	
Power:	320 W / 1,49 A	
Temperature (adjustable):	160480 °C 320896 °F	
Length of hose:	1 m	
Display:	LCD (2-double spaced)	



OPTIONAL:

Our trolley matches with the new PlastoFused-System. Stow the extensive accessories in the spacious trag.

Melting-Strips		Art-No.
PP-EPDM	White	804111
PP-EPDM	Black	804112
PP	White	804113
PP	Black	804114
ABS	White	804115
ABS	Black	804116
PA	White	804117
PA	Black	804118





REPAIRING DAMAGED TABS

A main problem of repairing bumpers are cracked tabs. You need a new bumper if this happens. Thanks to our new PlastoFused-System damaged tabs get reshaped. Repairing the tabs in a short period of time and a low cost-expenditure.



REPAIRING HOLES

Parkind damages - it happens again and again. For damaged bumpers we designed our new PlastoFused-System. Sell working hours instead of new components with a low margin.







PLASTOCLIP


Spacer-kit

With the aid of the spacer kit, you're able to melt in stainless steel clips in plastic parts with millimeter precision. Furthermore this solution is characterized by an elimination of penetration depth of the clips. This technical and uncomplicated solution obtains a very high efficiency and is open to a new broad field of application in all areas. An important advantage is the low training expense, where by a continuously high quality of the repair is guaranteed.

Utility model no.: 20 2013 003 425.4

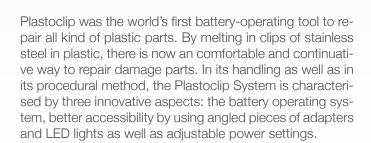





+49 (0) 6262 - 92 60 5-0

info@kamatec.com

+49 (0) 6262 - 92 60 5-29

Tel:

Fax:

Mail:

